







FEATURES & BENEFITS

Features

- Rigid mounted, normal spin, 100G factor (RX520) and 150G factor (RX350)
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- High capacity water inlets
- Large drain valve (2 x Ø 76 mm)

Options

- Coin operated
- Stainless steel front and side panels
- Liquid soap connection and pumps
- Steam heating version
- 3rd water inlet

Control


- XControl fully programmable control with 15 Pre-set programs
- XTronic Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)

SPECIFICATIONS

TYPE		RX350	RX520					
INNERDRUM								
Capacity 1:09	kg (lb)	37(82)	58(128)					
Capacity 1:10	kg (lb)	33(73)	52(115)					
Volume	litres	332	520					
Diameter	mm	914	914					
DRUM SPEED								
Wash	rpm	38	38					
Extraction	rpm	540	440					
G-FACTOR		150	100					
HEATING								
Electricity	kW	27	40,6					
Steam	bar	1 - 8	1 - 8					
Hot water	°C	90	90					
Sound pressure level	dB (A)	< 65	< 65					
Water valves connection	BSP	3/4"	1"					
Water pressure	kPa	100-800	100-800					
Rec. water pressure	kPa	300-500	300-500					
Water inlet	l/min	66-188	183-518					
Drain valve	outer Ø mm	2x76	2x76					
Flow amount with drain valve	l/min	2x210	2x210					
Steam valve connection	BSP	3/4"	3/4"					
Steam pressure	kPa	100-800	100-800					
DIMENSIONS								
Size H×W×D	mm	1500×1060×1030	1500×1060×1315					
Net weight	kg	410	520					
TRANSPORT DATA								
Packed H×W×D	mm	1625×1088×1060	1625×1088×1345					
Gross weight	kg	425	535					
* 200 G-factor execution								

DIMENSIONS

	Α	В	С	D	Е	F	G	Н	ı	J	K	L	М	N	Р	Q	R	S	Т
RX350	1060	1030	1500	936	465	318	120	1326	1366	113	248	383	671	1349	1413	528	66	145	482
RX520	1060	1315	1500	1221	465	318	120	1414	1374	88	223	363	671	1349	1332	528	66	145	482
	width	depth	height																

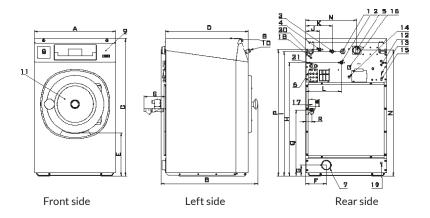

- Electrical connection
- Hot water
- 2. Cold water hard
- Cold water soft
- Main switch

- Liquid soap connection
- Drain
- 8. Soap dispenser
- Control panel
- 10. Button CENTRALSTOP
- 11. Door opening (Ø 460mm)
- 12. Fuses
- 13. USB port
- 14. Electrical connection to liquid soap pumps